

CARE + PRESERVATION

WOOD FINISH

Our standard finishes can handle multiple cleanings a day without wearing away.

Our wood finishes are achieved with aniline dyes and wood pigments with at least two coats of state-of-the-art lacquer and a UV absorber. This provides a very durable finish that is resistant to staining, scratching, and many chemical cleaners. Our topcoat has been tested to withstand heavy cleaning agents such as Virox to destroy bacteria, though it is recommended they be cleaned with a mild cleaning solution such as all-natural dish soap and a damp soft cloth whenever possible. Dry the surface by moving a soft cloth in the direction of the wood grain.

The TMC wood finishes, like all wood finishes, can be still light sensitive, therefore care should be taken to avoid placing your product in areas exposed to intense natural light.

FEATURES + BENEFITS

- UV ABSORBER ADDED TO ENSURE GOOD RESISTANCE TO YELLOWING
- VOC compliant as packaged*
- Meets the Federal HAPS** standard for wood finishes
- Excellent toughness and mar resistance
- Excellent moisture resistance
- Excellent resistance to household chemicals
- Excellent cold check and print resistances
- Free of lead and chromate hazards
- Formaldehyde free coating at application, during and following curing
- Self-sealing system
- Qualifies for UL GREENGUARD Gold Certification for low chemical emissions

**VOC compliance limits vary from state to state.*

***National Standards for Hazardous Air Pollutants (HAPS) Emissions for Wood Furniture Manufacturing Operations
CFR40, Part 63, Subpart JJ*


LAMINATE TABLE TOPS

Wipe with a damp sponge or cloth then wipe dry. For more rigorous cleaning, use mild detergent and warm water. Rinse thoroughly and dry with clean soft cloth.

CARE + PRESERVATION

VINYL

Stinson® Fuse 2.0

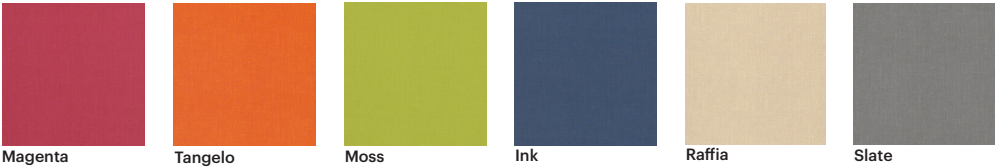

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Denim stain resistant
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable
- Enhanced fade resistance
- Indoor / Outdoor

Environmental

- GREENGUARD Gold Certified
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- Does not contain formaldehyde
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



| | |
|-----------|--|
| Content | Non-Phthalate Vinyl Surface with Polyester Backing |
| Finish | Advanced Soil and Stain Resistant Top Coat |
| Backing | Polyester |
| Weight | 28.0 oz./lin. yd. ± 1.0 oz. |
| Width | 54 inches |
| Roll Size | 30 yards |

Performance Characteristics

| | |
|---------------------------------|--|
| Abrasion Resistance** CFFA-1 | Exceeds 250,000 double rubs - heavy duty |
| Break Strength CFFA-17 | Warp: 95 lbs. min., Fill: 60 lbs. min. |
| Tear Strength CFFA-16 | Warp: 5.1 lbs. min., Fill: 6.9 lbs. min. |
| Seam Slippage CFFA-14 | Warp: 45 lbs. min., Fill: 45 lbs. min. |
| Colorfastness to Light AATCC-16 | 650 Hours, Class 4.0 |
| Crocking AATCC-8 | Dry: Class 5.0, Wet: Class 5.0 |
| Fluid Barrier | Inherent Fluid Barrier |
| Antimicrobial | This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface. |

Flammability*

| | |
|--|---------|
| California Technical Bulletin 117-2013 Section 1 | Passed |
| NFPA 260 | Class 1 |
| UFAC | Class 1 |



This product is formulated without phthalates.



CARE + PRESERVATION

LearnPLAY PRODUCT

CLEANING

Our Learning Panels and LearnPLAY Environments should be cleaned on a regular basis. All purpose detergent cleaner for wood surfaces may be used or mild cleaning solution. Our top coat has been tested to withstand heavy cleaning agents such as Virox to destroy bacteria. Cleaners or wipes with bleach and low alcohol content is best. Do not use boiling water or steam to clean.

For more information, please see our Technical Bulletin under Resources on our MAIN website.

MAINTENANCE

Our Learning Panels and LearnPLAY Products are designed to withstand the most rambunctious children [baby through 8 years of age]. Play areas in public settings may be exposed to misuse and is important that areas are inspected regularly. Sharp points and small parts can be hazardous to children. It is important that a regular visual inspection be included with cleaning routine.